

HAND HELD CALIBRATOR

SUPPLEMENTAL MANUAL for Use in Hazardous Environments

REVISION 6 09-27-21



LOOK FOR THESE MARKS ON OUR PRODUCTS

Includes warnings and installation drawings for using the Hand Held Calibrator in Hazardous areas as defined by Factory Mutual:

Class I, Division 1, Groups A, B, C and D Intrinsically Safe location Groups

Class I, Division 2, Groups A, B, C and D Non Incendive Hazardous location Groups

Includes warnings and installation drawings for using the Hand Held Calibrator in Hazardous areas as defined by CSA:

Class 1, Division 1, Groups A,B,C,D

Includes warnings and installation drawings for using the Hand Held Calibrator in Hazardous areas as defined by ATEX:

II 1 G FM12ATEX0035X

Ex ia II C T4 Ga -20C<Ta<+50

ENTITY PARAMETERS

Ui=33Vdc Ii=300mA Ci=0 Li=0 Pi=1.5W

Uo=5.735Vdc Io=586µA Co=46µf L0=1H

Po=840µW

FM21UKEX0003X

Additional Warnings for Intrinsically Safe approved versions

- An “Ex/hazardous” area as used in this manual refers to an area made hazardous by the potential presence of flammable or explosive gases or vapors. These areas are also referred to as hazardous locations.
- When marked with the following Symbols the calibrator is approved by Factory Mutual (FM) for use in Class In Division 1, Groups A,B,C,D hazardous areas, by ATEX for use in Ex ia II C T4 Ga -20C<Ta<+50C and by CSA for use in Class 1, Division 1, Groups A,B,C,D
- When marked as approved the ATE-2/PTE-2 calibrator is agency approved for use in areas when potentially flammable or explosive gas or

vapor may occur. These areas are referred to as hazardous (classified) location in the United States, as Hazardous Locations in Canada, as Potentially Explosive Atmospheres in Europe and as Explosive Gas Atmospheres in other parts of the world. The HHC’s voltage and current input jacks have entity parameters and as such can be utilized in a hazardous location to connect to other apparatus as long as said apparatus meets the requirements of the entity parameters.

- Before entering a hazardous area, close and secure with the lock screw both the battery door and USB/SD card door prior to use in a hazardous area.
- Replace batteries only in a non-hazardous area.

SPECIFIC CONDITIONS OF USE:

- **Use only Duracell Model MN1500 AA alkaline batteries primary cell batteries.**
- **The apparatus contains exposed metal parts that have a capacitance of 14pf, do not use in unsuitable application.**
- **No connections shall be made to the communications "USB" port in Hazardous (Classified) Locations**
- **Accessory P/N 101C225-01 must be used in conjunction with the USB port when used with non-assessed equipment**
- **The Panasonic BR1225 Lithium Battery is not user replaceable.**
- The battery access cover is not to be removed while in a hazardous area.
- The USB/SD access door is not to be removed while in a hazardous area.
- The USB connection-data transmission and power input- are restricted to be used in a non-hazardous area only.
- The non-hazardous area USB apparatus – computer port, wall supply, etc., connected to the USB port of the HHC, must be assessed and conform to section 6.2.5 of EN60079-11. This precaution is to protect the integrity of the safety components within the HHC, which insures its intrinsic safety rating while in the hazardous location.
- For use with non-assessed USB equipment accessory part number 101C225-01 is to be inserted between the HHC USB port and the non-assessed apparatus. not power the calibrator by USB cable in a hazardous area, this action will render the calibrator not intrinsically safe.
- Intrinsically safe installation diagrams, entity parameters and warnings are included in drawing 825A028 included in this manual.

		250 EAST MAIN ST. STRATFORD, CT 06614 www.ashcroft.com	
	INTRINSICALLY SAFE/SÉCURITÉ INTRINSÈQUE Exia CL I, DIV 1, GR A, B, C, D, T4 -20°C≤Ta≤+50°C		
	II 1 G Ex ia IIC T4 Ga -20°C≤Ta≤+50°C		
	FM12ATEX0035X FM21UKEX0003X		
	ENTITY PARAMETERS		
	Ui=33Vdc Ii=300mA Ci=0 Li=0 Pi=1.5W Uo=5.735Vdc Io=586µA Co=46µf L0=1H Po=840µW		
WARNING: See Dwg #825A028 for installation, batteries and warnings			
	HAND HELD CALIBRATOR 6D49 E171189 Unit contains a lithium battery. Panasonic #BR1225 is the approved replacement battery. Use of another battery may present a risk of fire or explosion. See owners manual for safety instructions.		
Label Part# 238A746-01Rev E			

Battery Installation


Use only Duracell Model MN1500 AA alkaline batteries primary cell batteries, quantity four.

1. To gain access to the battery compartment, loosen the strap assembly by detaching the Velcro connection and moving the strap to the side to allow access to the Philips head screw on the battery cover door.
2. Open the battery compartment by loosening the Philips head screw located in the battery compartment door immediately above the product label.
3. Using thumb and forefinger gently lift battery door up and toward the top of the calibrator to remove door.
4. Install four new AA Alkaline batteries. Observe polarity markings to install batteries correctly. Never mix old and new batteries.
5. Reinstall battery door. Be sure that lower latch tab is engaged beneath clasp hook to ensure proper watertight sealing of battery compartment.
6. Tighten Philips head screw in top of cover.


Replace strap by tightening strap and secure with Velcro.

The Panasonic lithium ion battery used to maintain power to the real time clock is not user serviceable. Return the calibrator to Ashcroft factory or an authorized service agent for replacement.

This drawing includes confidential information which is the property of ASHCROFT INC. This copy is loaned for the specific purpose, with the understanding that it will not be reproduced or used for other purposes without the express consent of Ashcroft and it will be returned on demand.



Item Qty.	Part No.	Description	Material	Finish	Dwg. No.	Used On
---	---	INSTALLATION DIAGRAM H.H.C.F.M. IS	-----	-----	825A028	877D039

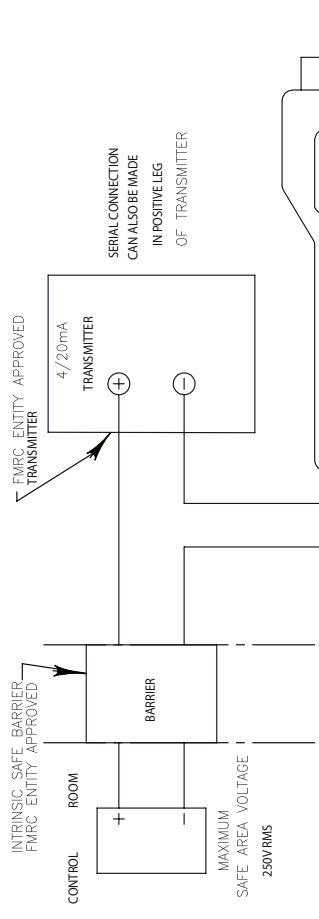

ENTITY PARAMETERS (DIVISIONS/ZONES):
 $U_i/U_{max} = 33Vdc$ $U_o/U_{oc} = 5.735Vdc$
 $I_i/I_{max} = 300mA dc$ $I_o/I_{sc} = 586\mu A dc$
 $P_i/P_i = 1.5W$ $P_o/P_o = 840uW$
 $C_i/C_i = 0$ $C_o/C_o = 46\mu f$
 $L_i/L_i = 0$ $L_o/L_o = 1H$

MODEL PTE-2 OR ATE-2
HAND HELD CALIBRATOR (HHG)

- NOTES:
 1. ENTITY CONCEPT DEFINITION: THE ENTITY CONCEPT ALLOWS INTERCONNECTION OF INTRINSICALLY SAFE APPARATUS TO ASSOCIATED APPARATUS NOT SPECIFICALLY EXAMINED IN SUCH COMBINATION. THE CRITERIA FOR INTERCONNECTION IS THAT THE VOLTAGE & CURRENT WHICH INTRINSICALLY SAFE APPARATUS CAN RECEIVE AND REMAIN INTRINSICALLY SAFE, CONSIDERING FAULTS, MUST BE EQUAL TO OR GREATER THAN THE VOLTAGE (V) & CURRENT (I) LEVELS, WHICH CAN BE DELIVERED BY THE ASSOCIATED APPARATUS, CONSIDERING FAULTS AND APPLICABLE FACTORS. IN ADDITION, THE MAXIMUM UNPROTECTED CAPACITANCE (C) AND INDUCTANCE (L) OF THE INTRINSICALLY SAFE APPARATUS, INCLUDING INTERCONNECTING WIRING, MUST BE EQUAL TO OR LESS THAN THE CAPACITANCE & INDUCTANCE WHICH CAN BE SAFELY CONNECTED TO ASSOCIATED APPARATUS.
 2. USE OF THE HAND HELD CALIBRATOR IN THE FIELD SHALL BE IN ACCORDANCE WITH THE TRANSMITTER MANUFACTURER'S INSTRUCTIONS AND THE TRANSMITTER MANUFACTURER'S INSTALLATION DIAGRAM, AS REFERENCED ON THE TRANSMITTER'S LABEL.
 3. INTRINSIC SAFETY IS CONTINGENT UPON THE HAND HELD CALIBRATOR'S USB / COMMUNICATIONS PORT COVER AND THE BATTERY COMPARTMENT COVER BEING PROPERLY INSTALLED ON THE CALIBRATOR AS REFERENCED IN THE OPERATING MANUAL.
 4. THE I/O OF THE MODEL PTE-2 & ATE-2 WHEN ADDED TO THE I/O OF THE ASSOCIATED APPARATUS MUST NOT EXCEED THE I/O OF THE TRANSMITTER.
 5. THE I/O OF THE MODEL PTE-2 & ATE-2 WHEN ADDED TO THE I/O OF THE ASSOCIATED APPARATUS MUST NOT EXCEED THE I/O OF THE TRANSMITTER.
 6. NO REVISIONS TO OCCUR WITHOUT PRIOR FACTORY MUTUAL RESEARCH AUTHORIZATION.
 7. INSTALLATION SHOULD BE IN ACCORDANCE WITH ANSIRISA RP12.6 "INSTALLATION OF INTRINSICALLY SAFE SYSTEMS FOR HAZARDOUS (CLASSIFIED) LOCATIONS" AND THE NATIONAL ELECTRICAL CODE (ANSI/NFPA 70).
 8. A SIMPLE APPARATUS IS A DEVICE WHICH WILL NEITHER GENERATE NOR STORE MORE THAN 1.2V, 0.1A, 25mW OR 20uJ.
 9. THE MAXIMUM CABLE LENGTH BETWEEN THE SIMPLE APPARATUS AND THE UNIVERSAL RTD INTERFACE PERIPHERAL IS A SIMPLE APPARATUS FOR USE ONLY WITH USERS RTD PROBE. SEE NOTES 7, 8 & 9.


IMPORTANT: DIMENSIONS WITHIN OVAL AND NOTES IDENTIFIED WITH " * " REQUIRE MANDATORY INSPECTION.

DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		INSTALLATION DIAGRAM, HAND HELD CALIBRATOR, FM IS CL.1 DIV.1, Groups A,B,C,D, CURRENT MEASUREMENT, SUPPLY - RETURN HOOK-UP	
TOLERANCES ARE:			
3 place decimal .000	±.007	SIZE	DWG. NO.
2 place decimal .00	±.015	REV.	A
1 place decimal .0	±.030	Scale 1:1	Sheet 1 of 6
Angle	Chamfer	A 825A028	
± 1 deg	± 5 deg	DO NOT SCALE DRAWING	


REV	ECO	DESCRIPTION	BY	DATE
A	6317	INITIAL RELEASE	AP	8/14/2013

CAO GENERATED DRAWING, DO NOT MANUALLY UPDATE	DATE
DRAWN BY	DATE

This drawing includes confidential information which is the property of ASHCROFT INC. This copy is loaned for the specific purpose, with the understanding that it will not be used or disclosed to others, and it will be returned on demand.




Item	Qty.	Part No.	Description	Material	Finish	Dwg. No.	Used On
---						825A028	877D039

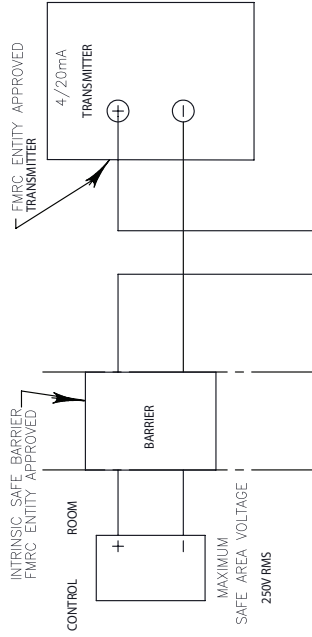

ENTITY PARAMETERS (DIVISIONS/ZONES):

- $U_i/U_{max} = 33Vdc$
- $I_i/I_{max} = 300mA dc$
- $P_i/P_i = 1.5W$
- $C_i/C_i = 0$
- $L_i/L_i = 0$
- $U_o/U_{oc} = 5.735Vdc$
- $I_o/I_{sc} = 586\mu A dc$
- $P_o/P_o = 840uW$
- $C_o/C_o = 46\mu f$
- $L_o/L_o = 1H$

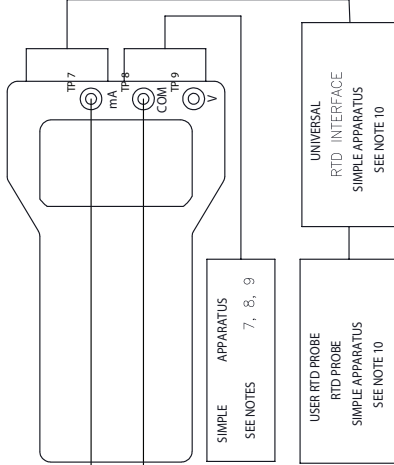

MODEL PTEZ OR ATEZ
HAND-HELD CALIBRATOR (HHO)

DATE GENERATED DRAWING,
DO NOT MANUALLY UPDATE
DRAWN BY DATE

REV	ECO	DESCRIPTION	BY	DATE
A	6317	INITIAL RELEASE	AP	8/14/2013

- NOTES:
- ENTRY CONCEPT DEFINITION: THE ENTITY CONCEPT FOLLOWS INTERCONNECTION OF INTRINSICALLY SAFE APPARATUS TO ASSOCIATED APPARATUS NOT SPECIFICALLY EXAMINED IN THIS COMBINATION. THE CRITERIA FOR INTERCONNECTION IS THAT THE VOLTAGE & CURRENT WHICH INTRINSICALLY SAFE APPARATUS CAN RECEIVE AND REMAIN INTRINSICALLY SAFE, CONSIDERING FAULTS, MUST BE EQUAL TO OR GREATER THAN THE VOLTAGE (V_i) & CURRENT (I_i) LEVELS, WHICH CAN BE DELIVERED BY THE ASSOCIATED APPARATUS, CONSIDERING FAULTS AND APPLICABLE FACTORS. IN ADDITION, THE MAXIMUM UNPROTECTED CAPACITANCE (C_i) AND INDUCTANCE (L_i) OF THE INTRINSICALLY SAFE APPARATUS, INCLUDING INTERCONNECTING WIRING, MUST BE EQUAL TO OR LESS THAN THE CAPACITANCE & INDUCTANCE WHICH CAN BE SAFELY CONNECTED TO ASSOCIATED APPARATUS.
 - USE OF THE HAND HELD CALIBRATOR IN THE FIELD SHALL BE IN ACCORDANCE WITH THE TRANSMITTER MANUFACTURER'S INSTRUCTIONS AND THE TRANSMITTER MANUFACTURER'S INSTALLATION DIAGRAM, AS REFERENCED ON THE TRANSMITTER'S LABEL.
 - INTRINSIC SAFETY IS CONTINGENT UPON THE HAND HELD CALIBRATOR'S USE; COMMUNICATIONS PORT COVER AND THE BATTERY COMPARTMENT COVER BEING PROPERLY INSTALLED ON THE CALIBRATOR AS REFERENCED IN THE OPERATING MANUAL.
 - THE U_o OF THE MODEL PTE-2 & ATE-2 WHEN ADDED TO THE U_o OF THE ASSOCIATED APPARATUS MUST NOT EXCEED THE U_i OF THE TRANSMITTER.
 - THE I_o OF THE MODEL PTE-2 & ATE-2 WHEN ADDED TO THE I_o OF THE ASSOCIATED APPARATUS MUST NOT EXCEED THE I_i OF THE TRANSMITTER.
 - NO DEVIATIONS TO OCCUR WITHOUT PRIOR FACTORY MUTUAL RESEARCH AUTHORIZATION.
 - INSTALLATION SHOULD BE IN ACCORDANCE WITH ANSIBISA 9712.6 "INSTALLATION OF INTRINSICALLY SAFE SYSTEMS FOR HAZARDOUS (CLASSIFIED) LOCATIONS" AND THE NATIONAL ELECTRICAL CODE (ANSI/NFPA 70).
 - A SIMPLE APPARATUS IS A DEVICE WHICH WILL NEITHER GENERATE NOR STORE MORE THAN 1.2V, 0.1A, 25mW OR 20uJ.
 - EXAMPLE SWITCHES, THERMOCOUPLES, L.E.D.s, OR I.T.D.s AND THE MAXIMUM CABLE LENGTH BETWEEN THE SIMPLE APPARATUS AND THE HAND HELD CALIBRATOR IS 5000 FT.
 - THE UNIVERSAL RTD INTERFACE PERIPHERALS AS SIMPLE APPARATUS FOR USE ONLY WITH USERS RTD PROBE. SEE NOTES 7, 8 & 9.

IMPORTANT: DIMENSIONS WITHIN OVAL AND NOTES IDENTIFIED WITH " * " REQUIRE MANDATORY INSPECTION.

DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES


TOLERANCES ARE:

- 3 place decimal .000 ±.007
- 2 place decimal .00 ±.015
- 1 place decimal .0 ±.030

Angle Chamfer
± 1 deg ± 5 deg

SIZE	DWG. NO.	REV.
A	825A028	A
Scale 1:1		Sheet 2 of 6

DO NOT SCALE DRAWING




This drawing includes confidential information which is the property of ASHCROFT INC. This copy is loaned for the specific purpose, with the understanding that it will not be reproduced or used for any other purpose or disclosed to others, and it will be returned on demand.

ASHCROFT INC.
250 EAST MAIN STREET,
STRAITFORD, CT 06614

Item	Qty.	Part No.	Description	Material	Finish	Dwg. No.	Used On
---				-----	-----	825A028	877D039

NOTES:
1. ENTITY CONCEPT DEFINITION:
THE ENTITY CONCEPT ALLOWS INTERCONNECTION OF INTRINSICALLY SAFE APPARATUS TO ASSOCIATED APPARATUS NOT SPECIFICALLY EXAMINED IN SUCH COMBINATION. THE CRITERIA FOR INTERCONNECTION IS THAT THE VOLTAGE & CURRENT WHICH INTRINSICALLY SAFE APPARATUS CAN RECEIVE AND REMAIN INTRINSICALLY SAFE, CONSIDERING FAULTS, MUST BE EQUAL TO OR GREATER THAN THE VOLTAGE (V) & CURRENT (I) LEVELS, WHICH CAN BE DELIVERED BY THE ASSOCIATED APPARATUS, CONSIDERING FAULTS AND APPLICABLE FACTORS. IN ADDITION, THE MAXIMUM UNPROTECTED CAPACITANCE (C) AND INDUCTANCE (L) OF THE INTRINSICALLY SAFE APPARATUS, INCLUDING INTERCONNECTING WIRING, MUST BE EQUAL TO OR LESS THAN THE CAPACITANCE & INDUCTANCE WHICH CAN BE SAFELY CONNECTED TO ASSOCIATED APPARATUS.
2. USE OF THE HAND HELD CALIBRATOR IN THE FIELD SHALL BE IN ACCORDANCE WITH THE TRANSMITTER MANUFACTURER'S INSTRUCTIONS AND THE TRANSMITTER MANUFACTURER'S INSTALLATION DIAGRAM, AS REFERENCED ON THE TRANSMITTER'S LABEL.
3. INTRINSIC SAFETY IS CONTINGENT UPON THE HAND HELD CALIBRATOR'S USB / COMMUNICATIONS PORT COVER AND THE BATTERY COMPARTMENT COVERING PROPERLY INSTALLED ON THE CALIBRATOR AS REFERENCED IN THE OPERATING MANUAL.
4. THE I/O OF THE MODEL PTE-2 & ATE-2 WHEN ADDED TO THE I/O OF THE ASSOCIATED APPARATUS MUST NOT EXCEED THE I/O OF THE TRANSMITTER.
5. THE I/O OF THE MODEL PTE-2 & ATE-2 WHEN ADDED TO THE I/O OF THE ASSOCIATED APPARATUS MUST NOT EXCEED THE I/O OF THE TRANSMITTER.
6. NO REVISIONS TO OCCUR WITHOUT PRIOR FACTORY MUTUAL RESEARCH AUTHORIZATION.
7. INSTALLATION SHOULD BE IN ACCORDANCE WITH ANSISA RPT2.6 "INSTALLATION OF INTRINSICALLY SAFE SYSTEMS FOR HAZARDOUS (CLASSIFIED) LOCATIONS" AND THE NATIONAL ELECTRICAL CODE (ANSINFPA 70).
8. A SIMPLE APPARATUS IS A DEVICE WHICH WILL NEITHER GENERATE NOR STORE MORE THAN 1.2V, 0.1A, 25mW OR 20uJ.
EXAMPLE: SWITCHES, THERMOCOUPLES, L.E.D's, OR R.T.D.'s.
9. THE MAXIMUM CABLE LENGTH BETWEEN THE SIMPLE APPARATUS AND THE HAND HELD CALIBRATOR IS 5000 FT.
10. THE UNIVERSAL RTD INTERFACE PERIPHERAL IS A SIMPLE APPARATUS FOR USE ONLY WITH USERS RTD PROBE. SEE NOTES 7, 8 & 9.
11. THIS DRAWING AND ALL ASSOCIATED TEST POINTS HAVE BEEN APPROVED BY FM AS INTRINSICALLY SAFE.

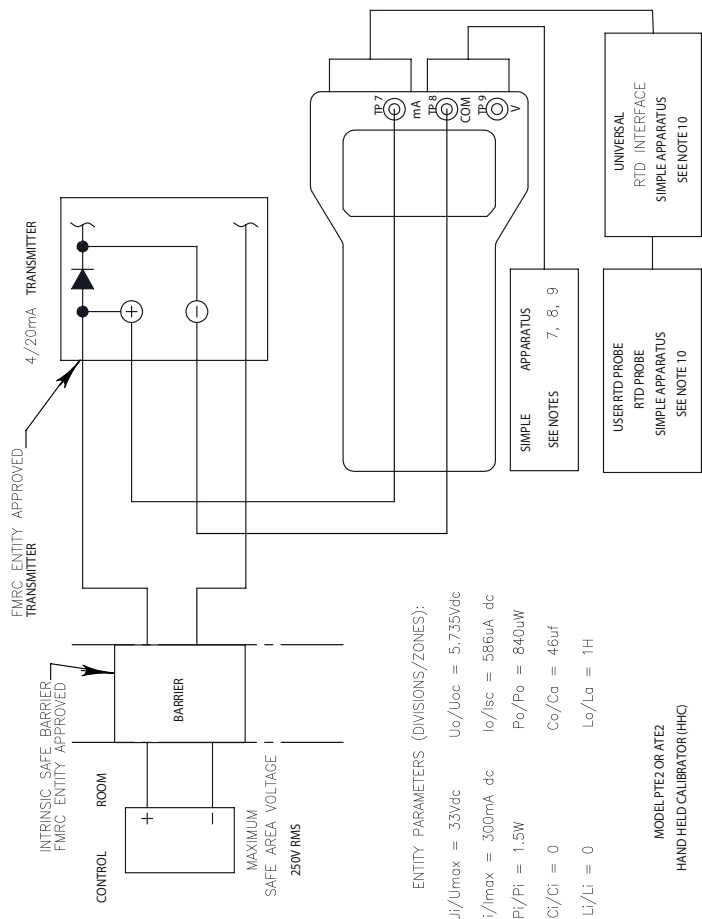

ENTITY PARAMETERS (DIVISIONS/ZONES):
 $U_i/U_{max} = 33Vdc$ $U_o/U_{oc} = 5.735Vdc$
 $I_i/I_{max} = 300mA dc$ $I_o/I_{sc} = 585uA dc$
 $P_i/P_i = 1.5W$ $P_o/P_o = 840uW$
 $C_i/C_i = 0$ $C_o/C_o = 46uF$
 $L_i/L_i = 0$ $L_o/L_o = 1H$

MODEL PTE2 OR ATE2
HAND HELD CALIBRATOR (HH)


CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	
DRAWN BY	DATE

REV	ECO	DESCRIPTION	BY	DATE
A	6317	INITIAL RELEASE	AP	8/14/2013

IMPORTANT: DIMENSIONS WITHIN OVAL AND NOTES IDENTIFIED WITH "*" REQUIRE MANDATORY INSPECTION.


DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		DIMENS. NO.		REV.
TOLERANCES ARE:		SIZE	A	A
3 place decimal	±.007	825A028		
2 place decimal	±.015			
1 place decimal	±.030			
Angle	Chamfer			
± 1 deg	± 5 deg			
DO NOT SCALE DRAWING		Scale 1:1	Sheet 3 of 6	

INSTALLATION DIAGRAM,
HAND HELD CALIBRATOR, FM
IS CL.1, DIV.1, Groups A,B,C,D,
CURRENT MEASUREMENT,
CUSTOMER "TEST POINT" HOOK-UP



Third angle projection

This drawing includes confidential information which is the property of ASHCROFT INC. This copy is loaned for the specific purpose, with the understanding that it will not be reproduced or used for any other purpose or disclosed to others, and it will be returned on demand.

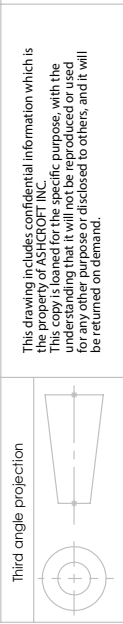


Item	Qty.	Part No.	Description	Material	Finish	Dwg. No.	Used On
	---			-----	-----	825A028	877D039

NOTES:
 1. ENTITY CONCEPT DEFINITION:
 THE ENTITY CONCEPT ALLOWS INTERCONNECTION OF INTRINSICALLY SAFE APPARATUS TO ASSOCIATED APPARATUS NOT SPECIFICALLY EXAMINED IN SUCH COMBINATION. THE CRITERIA FOR INTERCONNECTION IS THAT THE VOLTAGE & CURRENT WHICH INTRINSICALLY SAFE APPARATUS CAN RECEIVE AND REMAIN INTRINSICALLY SAFE, CONSIDERING FAULTS, MUST BE EQUAL TO OR GREATER THAN THE VOLTAGE (V) & CURRENT (I) LEVELS, WHICH CAN BE DELIVERED BY THE ASSOCIATED APPARATUS.
 2. USE OF THE HAND HELD CALIBRATOR IN THE FIELD SHALL BE IN ACCORDANCE WITH THE TRANSMITTER MANUFACTURER'S INSTRUCTIONS AND THE TRANSMITTER MANUFACTURER'S INSTALLATION DIAGRAM, AS REFERENCED ON THE TRANSMITTER'S LABEL.
 3. INTRINSIC SAFETY IS CONTINGENT UPON THE HAND HELD CALIBRATORS USB / COMMUNICATIONS PORT COVER AND THE BATTERY COMPARTMENT COVER BEING PROPERLY INSTALLED ON THE CALIBRATOR AS REFERENCED IN THE OPERATING MANUAL.
 4. THE Uo OF THE MODEL PTE-2 & ATE-2 WHEN ADDED TO THE Uo OF THE ASSOCIATED APPARATUS MUST NOT EXCEED THE Uo OF THE TRANSMITTER.
 5. THE Io OF THE MODEL PTE-2 & ATE-2 WHEN ADDED TO THE Io OF THE ASSOCIATED APPARATUS MUST NOT EXCEED THE Io OF THE TRANSMITTER.
 6. NO REVISIONS TO OCCUR WITHOUT PRIOR FACTORY MUTUAL RESEARCH AUTHORIZATION.
 7. INSTALLATION SHOULD BE IN ACCORDANCE WITH ANSISA RP12.6 "INSTALLATION OF INTRINSICALLY SAFE SYSTEMS FOR HAZARDOUS (CLASSIFIED) LOCATIONS" AND THE NATIONAL ELECTRICAL CODE (ANSINFPFA 70).
 8. A SIMPLE APPARATUS IS A DEVICE WHICH WILL NEITHER GENERATE NOR STORE MORE THAN 1.2V, 0.1A, 25mW OR 20uA.
 9. EXAMPLE: SWITCHES, THERMOCOUPLES, L.E. DS, OR R.T.D.'s AND THE MAXIMUM CABLE LENGTH BETWEEN THE SIMPLE APPARATUS AND THE HAND HELD CALIBRATOR IS 5,000 FT.
 10. THE UNIVERSAL RTD INTERFACE PERIPHERAL IS A SIMPLE APPARATUS FOR USE ONLY WITH USERS RTD PROBE. SEE NOTES 7, 8 & 9.



ENTITY PARAMETERS (DIVISIONS/ZONES):
 $U_i/U_{max} = 33Vdc$
 $I_i/I_{max} = 300mA$
 $P_i/P_o = 1.5W$
 $C_i/C_o = 0$
 $L_i/L_o = 0$
 $U_o/U_{oc} = 5.735Vdc$
 $I_o/I_{sc} = 586uA$
 $P_o/P_o = 840uW$
 $C_o/C_o = 46uF$
 $L_o/L_o = 1H$

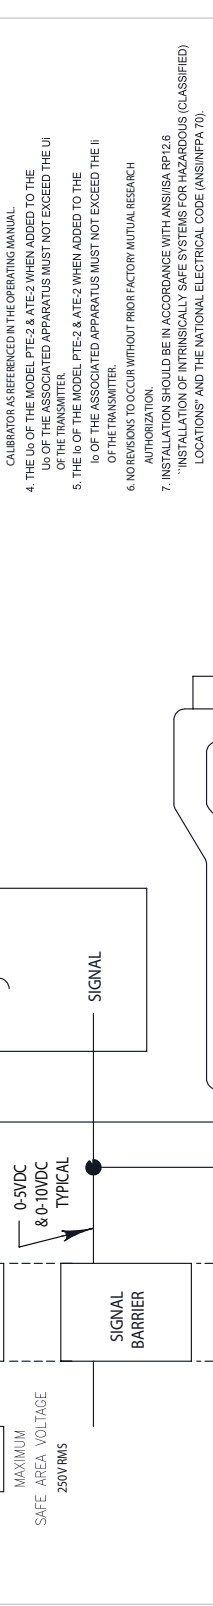

HAND HELD CALIBRATOR (HHC)
 MODEL PTE2 or ATE2

REV	ECO	DESCRIPTION	BY	DATE
A	6317	INITIAL RELEASE	AP	8/14/2013

CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE		DATE
DRAWNBY		

SIZE	DWG. NO.	REV.
1 place decimal .0	A	A
2 place decimal .00	825A028	
3 place decimal .000		
± .007		
± .015		
± .030		
± .050		
± .100		
± .150		
± .200		
± .250		
± .300		
± .350		
± .400		
± .450		
± .500		
± .550		
± .600		
± .650		
± .700		
± .750		
± .800		
± .850		
± .900		
± .950		
± 1.000		
± 1.050		
± 1.100		
± 1.150		
± 1.200		
± 1.250		
± 1.300		
± 1.350		
± 1.400		
± 1.450		
± 1.500		
± 1.550		
± 1.600		
± 1.650		
± 1.700		
± 1.750		
± 1.800		
± 1.850		
± 1.900		
± 1.950		
± 2.000		
± 2.050		
± 2.100		
± 2.150		
± 2.200		
± 2.250		
± 2.300		
± 2.350		
± 2.400		
± 2.450		
± 2.500		
± 2.550		
± 2.600		
± 2.650		
± 2.700		
± 2.750		
± 2.800		
± 2.850		
± 2.900		
± 2.950		
± 3.000		
± 3.050		
± 3.100		
± 3.150		
± 3.200		
± 3.250		
± 3.300		
± 3.350		
± 3.400		
± 3.450		
± 3.500		
± 3.550		
± 3.600		
± 3.650		
± 3.700		
± 3.750		
± 3.800		
± 3.850		
± 3.900		
± 3.950		
± 4.000		
± 4.050		
± 4.100		
± 4.150		
± 4.200		
± 4.250		
± 4.300		
± 4.350		
± 4.400		
± 4.450		
± 4.500		
± 4.550		
± 4.600		
± 4.650		
± 4.700		
± 4.750		
± 4.800		
± 4.850		
± 4.900		
± 4.950		
± 5.000		
± 5.050		
± 5.100		
± 5.150		
± 5.200		
± 5.250		
± 5.300		
± 5.350		
± 5.400		
± 5.450		
± 5.500		
± 5.550		
± 5.600		
± 5.650		
± 5.700		
± 5.750		
± 5.800		
± 5.850		
± 5.900		
± 5.950		
± 6.000		
± 6.050		
± 6.100		
± 6.150		
± 6.200		
± 6.250		
± 6.300		
± 6.350		
± 6.400		
± 6.450		
± 6.500		
± 6.550		
± 6.600		
± 6.650		
± 6.700		
± 6.750		
± 6.800		
± 6.850		
± 6.900		
± 6.950		
± 7.000		
± 7.050		
± 7.100		
± 7.150		
± 7.200		
± 7.250		
± 7.300		
± 7.350		
± 7.400		
± 7.450		
± 7.500		
± 7.550		
± 7.600		
± 7.650		
± 7.700		
± 7.750		
± 7.800		
± 7.850		
± 7.900		
± 7.950		
± 8.000		
± 8.050		
± 8.100		
± 8.150		
± 8.200		
± 8.250		
± 8.300		
± 8.350		
± 8.400		
± 8.450		
± 8.500		
± 8.550		
± 8.600		
± 8.650		
± 8.700		
± 8.750		
± 8.800		
± 8.850		
± 8.900		
± 8.950		
± 9.000		
± 9.050		
± 9.100		
± 9.150		
± 9.200		
± 9.250		
± 9.300		
± 9.350		
± 9.400		
± 9.450		
± 9.500		
± 9.550		
± 9.600		
± 9.650		
± 9.700		
± 9.750		
± 9.800		
± 9.850		
± 9.900		
± 9.950		
± 10.000		

IMPORTANT: DIMENSIONS WITHIN OVAL AND NOTES IDENTIFIED WITH " * * " REQUIRE MANDATORY INSPECTION.

INSTALLATION DIAGRAM, HAND HELD CALIBRATOR, FM IS CL.1, DIV.1, Groups A,B,C,D, VOLTAGE MEASUREMENT, 3 WIRE SYSTEM HOOK-UP

DO NOT SCALE DRAWING

Scale 1:1

Sheet 4 of 6




This drawing includes confidential information which is the property of ASHCROFT INC. This copy is loaned for the specific purpose, with the understanding that it will not be reproduced or used for any other purpose or disclosed to others, and it will be returned on demand.

ASHCROFT INC.
250 EAST MAIN STREET,
STRATFORD, CT 06614

Item	Qty.	Part No.	Description	Material	Finish	Dwg. No.	Used On
---	---	---	---	-----	-----	825A028	877D039

Third angle projection


FIMRC ENTITY APPROVED INTRINSIC SAFE BARRIER VOLTAGE BARRIERS MUST BE APPROVED BY BARRIER MANUFACTURER FOR THIS CONFIGURATION

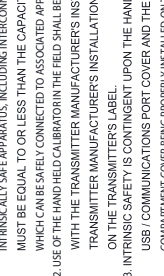


CONTROL ROOM

24VDC
MAXIMUM SAFE AREA VOLTAGE 250V RMS

FIMRC ENTITY APPROVED TRANSUCER

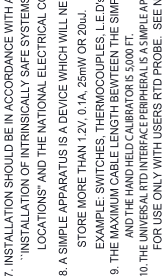

0-5VDC & 0-10VDC TYPICAL

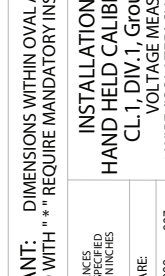

ENTITY PARAMETERS (DIVISIONS/ZONES):
 $U_i/U_{oc} = 33Vdc$
 $I_i/I_{max} = 300mA\ dc$
 $P_i/P_i = 1.5W$
 $C_i/C_i = 0$
 $L_i/L_i = 0$
 $U_o/U_{oc} = 5.735Vdc$
 $I_o/I_{sc} = 586\mu A\ dc$
 $P_o/P_o = 840\mu W$
 $Co/Co = 46\mu f$
 $Lo/La = 1H$



UNIVERSAL RTD INTERFACE SIMPLE APPARATUS SEE NOTE 10

CAD GENERATED DRAWING. DO NOT MANUALLY UPDATE

REV	ECO	DESCRIPTION	BY	DATE
A	6317	INITIAL RELEASE	AP	8/14/2013

NOTES:
 1. ENTITY CONCEPT DEFINITION:
 THE ENTITY CONCEPT ALLOWS INTERCONNECTION OF INTRINSICALLY SAFE APPARATUS TO ASSOCIATED APPARATUS NOT SPECIFICALLY EXAMINED IN SUCH COMBINATION. THE CRITERIA FOR INTERCONNECTION IS THAT THE VOLTAGE & CURRENT WHICH INTRINSICALLY SAFE APPARATUS CAN RECEIVE AND REMAIN INTRINSICALLY SAFE, CONSIDERING FAULTS, MUST BE EQUAL TO OR GREATER THAN THE VOLTAGE (V) & CURRENT (I) LEVELS, WHICH CAN BE DELIVERED BY THE ASSOCIATED APPARATUS, CONSIDERING FAULTS AND APPLICABLE FACTORS. IN ADDITION, THE MAXIMUM UNPROTECTED CAPACITANCE (C) AND INDUCTANCE (L) OF THE INTRINSICALLY SAFE APPARATUS, INCLUDING INTERCONNECTING WIRING, MUST BE EQUAL TO OR LESS THAN THE CAPACITANCE & INDUCTANCE WHICH CAN BE SAFELY CONNECTED TO ASSOCIATED APPARATUS.

2. USE OF THE HAND HELD CALIBRATOR IN THE FIELD SHALL BE IN ACCORDANCE WITH THE TRANSMITTER MANUFACTURER'S INSTRUCTIONS AND THE TRANSMITTER MANUFACTURER'S INSTALLATION DIAGRAM, AS REFERENCED ON THE TRANSMITTER'S LABEL.

3. INTRINSIC SAFETY IS CONTINGENT UPON THE HAND HELD CALIBRATOR'S USB / COMMUNICATIONS PORT COVER AND THE BATTERY COMPARTMENT COVER BEING PROPERLY INSTALLED ON THE CALIBRATOR AS REFERENCED IN THE OPERATING MANUAL.

4. THE U_o OF THE MODEL PTE2 & ATE2 WHEN ADDED TO THE U_o OF THE ASSOCIATED APPARATUS MUST NOT EXCEED THE U_i OF THE TRANSMITTER.

5. THE I_o OF THE MODEL PTE-2 & ATE-2 WHEN ADDED TO THE I_o OF THE ASSOCIATED APPARATUS MUST NOT EXCEED THE I_i OF THE TRANSMITTER.

6. NO REVISIONS TO OCCUR WITHOUT PRIOR FACTORY MUTUAL RESEARCH AUTHORIZATION.

7. INSTALLATION SHOULD BE IN ACCORDANCE WITH ANS/ISA RP12.8 "INSTALLATION OF INTRINSICALLY SAFE SYSTEMS FOR HAZARDOUS (CLASSIFIED) LOCATIONS" AND THE NATIONAL ELECTRICAL CODE (ANS/NFPA 70).

8. A SIMPLE APPARATUS IS A DEVICE WHICH WILL NEITHER GENERATE NOR STORE MORE THAN 1.2V, 0.1A, 25mW OR 20uJ.
 EXAMPLE: SWITCHES, THERMOCOUPLES, L.E.D.'S, OR R.T.D.'S.
 AND THE HAND HELD CALIBRATOR IS 5.3000 FT. LBS. OF ENERGY.
 9. THE MAXIMUM CABLE LENGTH BETWEEN THE SIMPLE APPARATUS AND THE HAND HELD CALIBRATOR IS 5.3000 FT.
 10. THE USER RTD PROBE IS A SIMPLE APPARATUS.
 FOR USE ONLY WITH USERS RTD PROBE. SEE NOTES 7, 8 & 9.

IMPORTANT: DIMENSIONS WITHIN OVAL AND NOTES IDENTIFIED WITH " * " REQUIRE MANDATORY INSPECTION.

DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES

TOLERANCES ARE
 3 place decimal .000 ±.007
 2 place decimal .00 ±.015
 1 place decimal .0 ±.030

Angle Chamfer
 ± 1 deg ± 5 deg

DO NOT SCALE DRAWING

INSTALLATION DIAGRAM,
 HAND HELD CALIBRATOR, FM IS
 CL.1, DIV.1, Groups A,B,C,D,
 VOLTAGE MEASUREMENT
 4 WIRE (ISOLATED) SYSTEM HOOK-UP

SIZE DWG. NO. REV.
 A 825A028 A

Scale 1:1 Sheet 5 of 6

Third angle projection



This drawing includes confidential information which is the property of Ashcroft Inc. This copy is loaned for the specific purpose, with the understanding that it will not be reproduced or used for any other purpose or disclosed to others, and it will be returned on demand.

ASHCROFT INC.
250 EAST MAIN STREET,
STRAITFORD, CT 06614

Item Qty.	Part No.	Description	Material	Finish	Dwg. No.	Used On
---		INSTALLATION DIAGRAM - HHC - FM IS	-----	-----	825A028	877D039

INDEX OF PRESSURE MODULES APPROVED BY FACTORY MUTUAL RESEARCH

PRESSURE MODULES HM2 FOR USE WITH MODEL PTE2 BASE UNIT; PRESSURE MODULE MODELS AM2 FOR USE WITH MODEL ATE2 BASE UNIT OF THE HAND HELD CALIBRATOR (HHC).

Pressure ranges include Vacuum, Compound, Differential, Absolute, and Gauge pressures ranging from .25"H2O to 10,000 PSI, and their equivalents in other engineering units.

- WARNING: USE ONLY DURACELL MODEL MN1500 AA ALKALINE PRIMARY CELL BATTERIES;
- WARNING: BATTERIES ARE TO BE REPLACED ONLY IN A NON-HAZARDOUS LOCATION;
- WARNING: THE BATTERY ACCESS COVER IS NOT TO BE REMOVED, WHILE IN A HAZARDOUS LOCATION;
- WARNING: USE ONLY PANASONIC BR1225 LITHIUM COIN BATTERIES FOR REAL TIME CLOCK BACKUP.
- WARNING: REFER TO OPERATING MANUAL FOR PROPER LITHIUM BATTERY INSTALLATION INSTRUCTIONS.
- WARNING: THE USB/SD ACCESS COVER IS NOT TO BE REMOVED, WHILE IN A HAZARDOUS LOCATION;
- WARNING: THE USB CONNECTION -DATA TRANSMISSION AND POWER INPUT- ARE RESTRICTED TO BE USED IN A NON-HAZARDOUS AREA ONLY;
- THE NON-HAZARDOUS AREA USB APPARATUS -COMPUTER PORT, WALL SUPPLY, ETC, CONNECTED TO THE USB PORT OF THE HHC, MUST BE ASSESSED AND CONFORM TO SECTION 6.2.5 OF EN60079-11. THIS PRECAUTION IS TO PROTECT THE INTEGRITY OF THE SAFETY COMPONENTS WITHIN THE HHC, WHICH INSURES ITS INTRINSIC SAFETY RATING WHILE IN THE HAZARDOUS LOCATION.
- FOR USE WITH NON-ASSESSED EQUIPMENT:
- ASHCROFT ACCESSORY P/N 101C225-01; USB PROTECTION DEVICE IS INTENDED TO PROTECT THE HHC IN A NON-HAZARDOUS AREA, WHEN USED WITH NON-ASSESSED EQUIPMENT;
- TO INSURE THE PROTECTION, THE DEVICE (ASHCROFT P/N 101C225-01) IS TO BE INSERTED BETWEEN THE HHC USB PORT AND A NON-ASSESSED APPARATUS.
- THE MAX. INPUT VOLTAGE TO BE 5.25 VDC

USB PORT ENTITY PARAMETERS (DIVISIONS/ZONES)

$$U_o/U_{oc} = 5.735VDC \quad P_o/P_o = 179mW$$

REV	ECO	DESCRIPTION	BY	DATE
A	6317	INITIAL RELEASE	AP	8/14/2013
B	7243	REMOVED INDIVIDUAL PRESSURE RANGES - SH16	TB	6/18/2014

CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	
DRAWN BY	DATE

IMPORTANT: DIMENSIONS WITHIN OVAL AND NOTES IDENTIFIED WITH " * " REQUIRE MANDATORY INSPECTION.

DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

3 place decimal .000 ±.007

2 place decimal .00 ±.015

1 place decimal .0 ±.030

Angle Chamfer ± 1 deg ± .5 deg

DO NOT SCALE DRAWING

SIZE DWG. NO.

A 825A028

REV.

B

Scale 1:1

Sheet 6 of 6

Aleksy Polonsky

8/14/13

Ashcroft Inc.
250 E. Main Street
Stratford, CT 06614-5145
Tel: 203-378-8281
Fax: 203-385-0402
email: info@heise.com
www.heise.com

© Ashcroft Inc. 2021
I&M002-10212 09-27-21